

Control4® Square Wireless Configurable Keypad



Control4® Square Wireless Configurable Keypad, C4-SKC-N

The Control4® Wireless Configurable Keypad is an elegant and customizable user interface that unlocks the power of one-touch automation. The keypad can be configured with two to seven buttons using five different button sizes for a total of 38 possible configurations. There's no need to worry about how many buttons will be needed on a specific keypad prior to (or even after) installation.

- Wireless communication and standard wiring provide easy installation in new construction and retrofit environments.
- Elegant, sophisticated design makes a beautiful addition to any home or business.
- Custom engraving available to clearly identify each button.
- Backlit button engraving with programmable color control for easy readability regardless of time of day or light level.
- Programmable RGB LEDs provide status feedback for lighting and other devices in the system.
- Ambient light sensor automatically adjusts backlight and status LED brightness depending on the light level in the room.
- Ships as "Neutral" device with no buttons included. Keypad-style button kit and Rocker-style button kits sold separately in a variety of colors (see "Available accessories").
- Control4® screw-less faceplates, sold separately, provide a sleek profile (see "Available accessories").
- Installs in standard square (UK/China-style) or round (EU-style) wall boxes. Round (EU-style) wall boxes require trim ring (see "Available accessories").
- Power using mains voltage (120V to 277V) or low voltage (using Control4 36V or 48V power supply).

Control4® Square Wireless Configurable Keypad

| Model number | C4-SKC-N |
|--|---|
| Power requirements | 110-277VAC +/-10%, 50/60 Hz, 48VDC or 36VDC This device requires a neutral AC connection except when used in combination with a Control4 wireless dimmer in a multi-way wiring scenario. |
| Power consumption | 120V: 350mW 240V: 480mW 277V: 540mW 36VDC: 430mW |
| Environmental | |
| Operational temperature | 32°F - 104°F (0°C - 40°C) |
| Humidity | 5% to 95% non-condensing |
| Storage | -4°F - 158°F (-20°C - 70°C) |
| Miscellaneous | |
| Control communications | ZigBee, IEEE 802.15.4, 2.4 GHz, 15-channel spread spectrum radio |
| Wires per connector | One 0.5 mm ² - 2.5 mm ² (20AWG - 10AWG) OR Two 0.5 mm ² - 1.5 mm ² (20AWG - 16AWG) |
| Dimensions | 83 × 71 × 17 mm (3.3 × 2.8 × 0.7 in) |
| Weight | 0.05 kg (0.12 lb.) |
| Shipping weight | 0.08 kg (0.18 lb.) |
| Available accessories | |
| Square Device Keypad Button Kit (C4-CKSK-xx) | WH, SW, BL, MB, AU |
| Square Device Rocker Button Kit (C4-CKSR-xx) | WH, SW, BL, MB, AU |
| Square Faceplate (C4-SFP1-xx) | WH, LA, IV, BR, BL, SW, MB, BI, AU, SN, SS, VB |
| Square Dual Faceplate (C4-SFP2-xx) | WH, BL, SW, MB, AU |
| Square Trim Ring (C4-SSTR-xx) | WH, BL, SW, MB, AU |
| Square Dual Trim Ring (C4-SDTR-xx) | WH, BL, SW, MB, AU |
| Engraved Button, Single High (C4-EBD1H-xx) | WH, LA, IV, BR, BL, SW, MB, BI, AU |
| Engraved Button, Double High (C4-EBD2H-xx) | WH, LA, IV, BR, BL, SW, MB, BI, AU |
| Engraved Button, Triple High (C4-EBD3H-xx) | WH, LA, IV, BR, BL, SW, MB, BI, AU |
| Engraved Button, Rocker (C4-EBDR-xx) | WH, LA, IV, BR, BL, SW, MB, BI, AU |

Gloss colors: WH=White, LA=Light Almond, IV=Ivory, BR=Brown, BL=Black

Satin colors: SW=Snow White, MB=Midnight Black, BI=Biscuit, AU=Aluminum


Metal finishes: SN=Satin Nickel, SS=Stainless Steel, VB=Venetian Bronze




SQUARE WIRELESS CONFIGURABLE KEYPAD

SKU: C4-SKC-N


FRONT

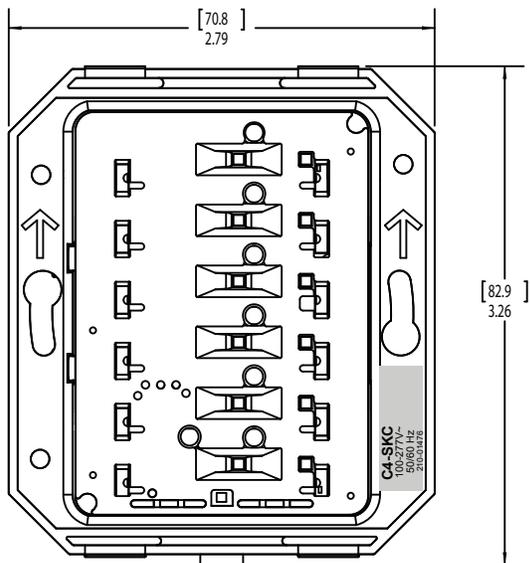

TOP

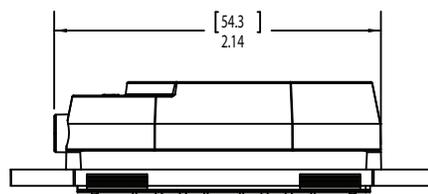

BACK

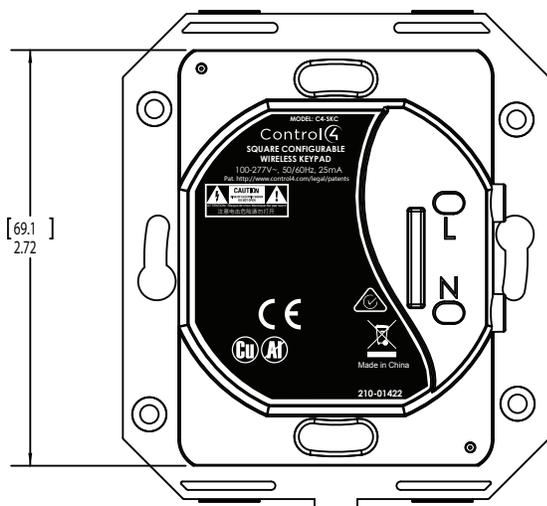

SIDE

